FORDPERFORMANCE





January 17, 2025

Technical Service Bulletin – 28


Fuel Cell Fittings – Fuel Cell Pump Out

Purpose: To allow for a closed system fuel pump out process with the addition of a Staubli quick disconnect fitting assembly. Applies to vehicles 1-40.

Fuel Cell Cover Plate With Fittings Installed



Vehicle With Pump Out System

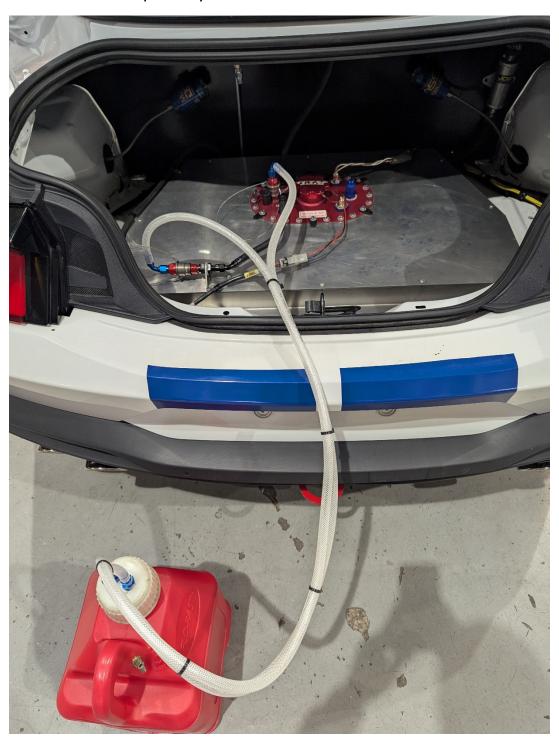

The update requires the following parts and the drilling of one hole in the fuel cell cover plate.


New parts

Staubli Fitting

Staubli Quick Disconnect & Nut
McMaster-Carr Washer
SPT08.5655/L/JKV
95606A560

Cover Plate Modification

Drill 19 mm through holes at the defined locations if adding both a Staubli and a dash 8 AN bulkhead fitting (Optional).

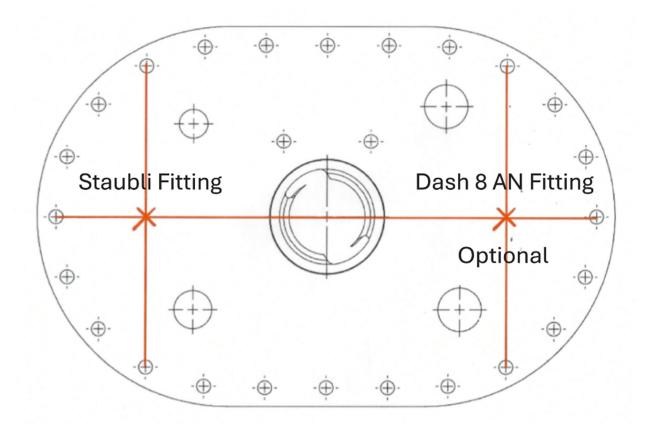

Staubli Pump Out Fitting Return Assembly



There is an option to add a second hole for a dash 8 AN bulkhead fitting if needed for any other pump out or fueling use.

New Parts

Optional Dash 8 AN Bulkhead Fitting

ATL Dash 8 AN Bulkhead Fitting & Nut TF232
ATL Dash 8 AN Cap AN929-8D
McMaster-Carr Washer 95606A560

Dash 8 AN Bulkhead Fitting Assembly

